



Specifications - Single Layer Double - Ribbed Neoprene Vibration Isolation Pad (50 Duro Neoprene)

IR-X-X Neoprene Pad (double-ribbed)	x		Load range		Optimum load		Approx. WT.	
	in	mm	lb	KN	lb	KN	lb	Kg
	2.0	50.8	90 - 250	0.401 - 1.113	180.0	0.80	0.05	0.03
	3.0	76.2	220 - 550	0.979 - 2.447	410.0	1.82	0.09	0.05
	4.0	101.6	385 - 970	1.713 - 4.315	720.0	3.20	0.16	0.08
	6.0	152.4	850 - 2200	3.781 - 9.878	1650.0	7.34	0.39	0.18
	9.0	228.6	2050 - 4900	9.119 - 21.797	3650.0	16.24	0.80	0.37
	12.0	304.8	3550 - 8720	15.792 - 38.789	6500.0	28.91	1.43	0.65
	18.0	457.2	8060 - 19550	35.853 - 86.963	14600.0	64.94	3.45	1.57
	T		Deflection Range				Optimum Deflection	
in	mm	in		mm		in	mm	
3/8	9.6	0.05 To 0.09		1.3 To 22.9		0.07	1.80	

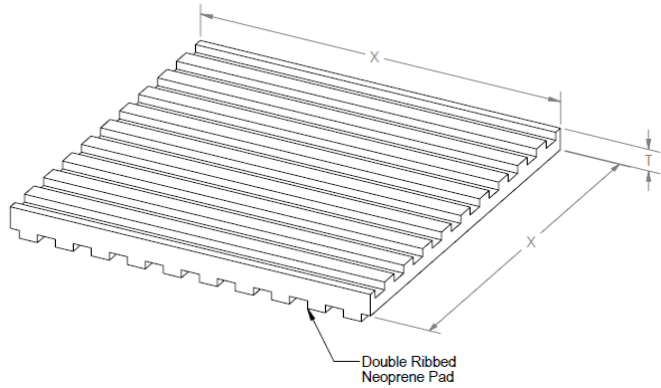

Double Ribbed Neoprene Pad

IRM-X-X Neoprene pad c/w Galvanized Sheetmetal (Load distribution plate)	x		Load range		Optimum load		Approx. WT.	
	in	mm	lb	KN	lb	KN	lb	Kg
	2.0	50.8	90 - 250	0.401 - 1.113	180.0	0.80	0.12	0.06
	3.0	76.2	220 - 550	0.979 - 2.447	410.0	1.82	0.25	0.12
	4.0	101.6	385 - 970	1.713 - 4.315	720.0	3.20	0.45	0.21
	6.0	152.4	850 - 2200	3.781 - 9.878	1650.0	7.34	1.03	0.47
	9.0	228.6	2050 - 4900	9.119 - 21.797	3650.0	16.24	2.25	1.03
	12.0	304.8	3550 - 8720	15.792 - 38.789	6500.0	28.91	4.01	1.82
	18.0	457.2	8060 - 19550	35.853 - 86.963	14600.0	64.94	9.25	4.2
	T		Deflection Range				Optimum Deflection	
in	mm	in		mm		in	mm	
7/16	11.1	0.05 To 0.09		1.3 To 22.9		0.07	1.80	

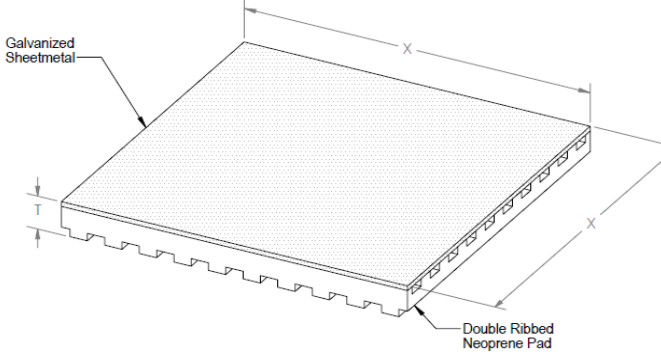

Galvanized Sheetmetal

Double Ribbed Neoprene Pad

Project Information:		Equipment Information:	
Customer:		Type:	
Consulting Engineer:		Model:	
Project:		Weight:	
Drawing No.:		Qty Required	
Note:			