


ISRS-58 ROD STIFFENERS WITH 1-5/8" STRUT

File No.: ISCOS- ISRS-58


Date:06/17/22

ISOIN-ISRS-58 Installation Instructions Document, to be Reviewed for Installation

SPECIFICATIONS - ISRS-58 ROD STIFFENERS WITH 1-5/8" STRUT								
Rod Size	Max. Rod Length Without Rod Stiffener		Max. Compression Force Without Stiffener		Max. Spacing Between Strut Channel Nuts		Max. Compression Force With Stiffener	
	in	mm	lbf.	kN	in	mm	lbf.	kN
3/8	18	457.2	410	1.82	13	330.2	1246	5.54
1/2	25	635.0	730	3.24	18	457.2	2105	9.36
5/8	31	787.4	1160	5.16	23	584.2	3187	14.17
3/4	37	939.8	1690	7.51	28	711.2	4493	19.98
7/8	43	1092.2	2320	10.32	33	838.2	6021	26.78

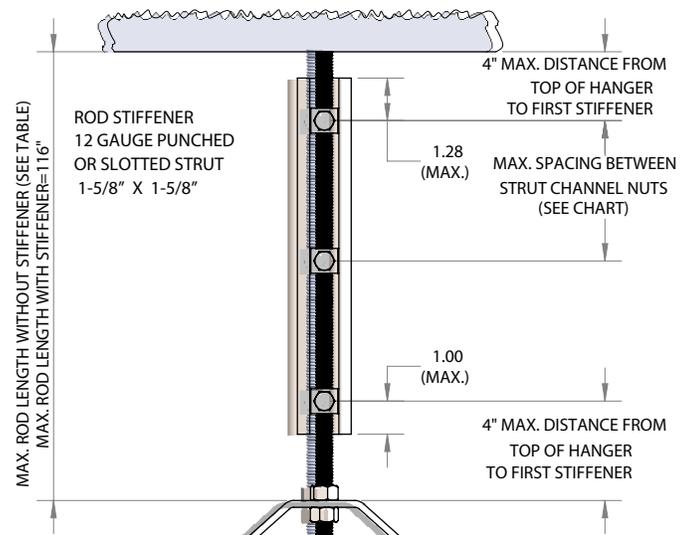

3/8" THRU 7/8" ROD SIZE

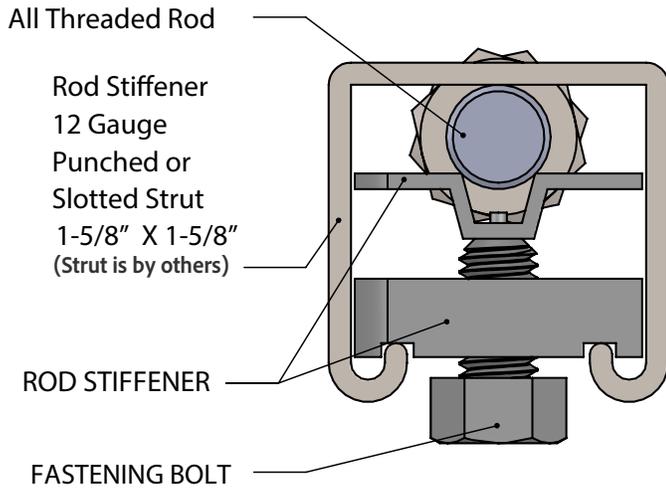

- Note:**
- 1) ROD STIFFENERS ARE REQUIRED ONLY ON VERTICAL STRUT COMPONENT OF THE SEISMIC BRACE SYSTEM ON HANGER AND TRAPEZE ASSEMBLIES THAT HAVE SEISMIC BRACING ATTACHED AT OR WITHIN 4" OF THE ROD. A MINIMUM OF TWO ROD STIFFENERS MUST BE INSTALLED.
 - 2) DETAIL APPLIES TO ALL HUNG UTILITIES INCLUDING SINGLE HUNG UTILITIES, TRAPEZE HUNG UTILITIES, AND HUNG EQUIPMENT.
 - 3) AN EXCEPTION IS THE USE OF TWO OPPOSING RIGID BRACES AT THE SAME LOCATION. FOR INDIVIDUALLY HUNG PIPE THE TWO OPPOSING RIGID BRACES MUST BE AT THE SAME HANGER ROD; TOTAL OF TWO (2) FOR TRANSVERSE, OR TWO (2) FOR LONGITUDINAL. FOR A TRAPEZE HANGER THE TWO OPPOSING RIGID BRACES MUST BE AT THE SAME HANGER ROD; TOTAL OF TWO (2) FOR TRANSVERSE, OR FOUR (4) FOR LONGITUDINAL. THE TWO OPPOSING BRACES MUST BE AT THE SAME ANGLE FROM HORIZONTAL AND WITHIN 5- DEGREES OF 180 DEGREES FROM EACH OTHER. IN THIS CASE NO STIFFENING OF VERTICAL ROD IS NECESSARY

PROJECT INFORMATION		EQUIPMENT INFORMATION		CANADA	UNITED STATES
Customer:		Type:		8 High Meadow Place, North York, ON M9L 2Z5, CANADA	800-7700 Irvine Center Dr., Irvine, CA 92618, U.S.A.
Project:		Qty Required:		C: 416-831-3000	C: 714-264-8090
Drawing No:		Operating Weight:		www.isotechindustries.com	
Notes:					