

SPECIFICATIONS - 1" DEFLECTION SPRING HANGER INLINE WITH NEOPRENE ELEMENT

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	Lbs.	KN	in	mm		Lbs.	Kg
IHSE-15	15	0.067	1.0	25.4	GREY	0.70	0.32
IHSE-30	30	0.134	1.0	25.4	BLACK	0.71	0.33
IHSE-50	50	0.223	1.0	25.4	RED	0.73	0.34
IHSE-75	75	0.334	1.0	25.4	WHITE	0.73	0.34
IHSE-100	100	0.445	1.0	25.4	YELLOW	0.75	0.35
IHSE-125	125	0.557	1.0	25.4	BLUE	0.78	0.36
IHSE-150	150	0.668	1.0	25.4	ORANGE	0.80	0.37
IHSE-200	200	0.89	1.0	25.4	BROWN	0.81	0.37

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED


Dimension

1" DEFLECTION SPRING HANGER INLINE WITH NEOPRENE ELEMENT

Model	H		W		L	
	in	mm	in	mm	in	mm
IHSE-15-200	4 1/2	115	2 3/8	61	2 1/16	53

Notes:

- Housing is designed to allow 15° misalignment for hanger rod
- Neoprene Element is designed to provide up to 0.28" deflection at rated load
- Spring and Housing are powder – coated for maximum corrosion protection, and are designed to have minimum 50% over travel under rated load

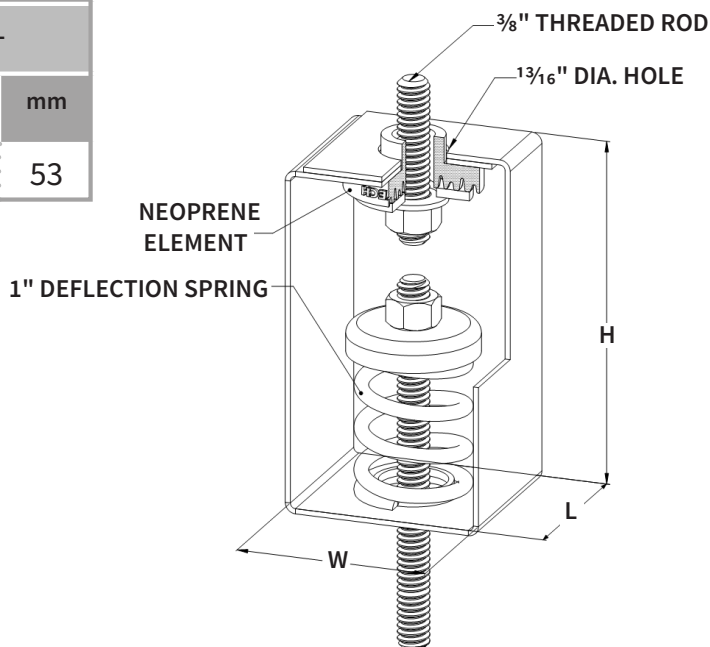

PROJECT INFORMATION		EQUIPMENT INFORMATION		<div>Canada location</div> <div>35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001 www.isotechindustries.com </div> <div>USA Location</div> <div>7700 Irvine Centre Drive Suite 800 Irvine, CA, 92618 U.S.A T: 949-788-2930 </div>	<div>VISCOMA</div> <div>MEMBER</div>
Customer:		Type:			
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:					