



## Double Layer Double - Ribbed Neoprene (double-ribbed)


Model IRES-X-X  Double Ribbed Neoprene Pad (double-ribbed)	X		LOAD RANGE		OPTIMUM LOAD		APPROX. WT.	
	in	mm	Lbs.	KN	Lbs.	KN	Lbs.	Kg
	3.0	76.2	220-750	0.979 - 3.34	580.0	1.82	0.42	0.2
4.0	101.6	385-1230	1.713 - 5.47	890.0	3.20	0.82	0.38	
6.0	152.4	850-2910	3.781 - 12.94	2100.0	7.34	1.86	0.85	
T	DEFLECTION RANGE						OPTIMUM DEFLECTION	
in	mm	in		mm		in	mm	
1 <sup>3</sup> / <sub>16</sub>	19.1	0.10 To 0.22		2.8 To 5.8		0.19	4.83	

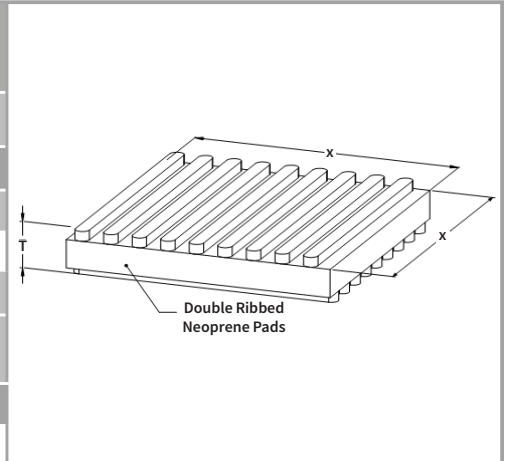

## Double Layer Double - Ribbed Neoprene pad c/w Galvanized Sheetmetal (Load distribution plate)

Model IRESM-X-X  Double Ribbed Neoprene Pad c/w Galvanized Sheetmetal (Load distribution plate)	X		LOAD RANGE		OPTIMUM LOAD		APPROX. WT.	
	in	mm	Lbs.	KN	Lbs.	KN	Lbs.	Kg
	3.0	76.2	220-750	0.979 - 3.34	580.0	2.58	0.42	0.2
4.0	101.6	385-1230	1.714 - 5.47	890.0	3.96	0.82	0.38	
6.0	152.4	850-2910	3.781 - 12.94	2100.0	9.34	1.86	0.85	
T	DEFLECTION RANGE						OPTIMUM DEFLECTION	
in	mm	in		mm		in	mm	
1 <sup>3</sup> / <sub>16</sub>	20.6	0.10 To 0.20		2.8 To 5.1		0.16	4.00	

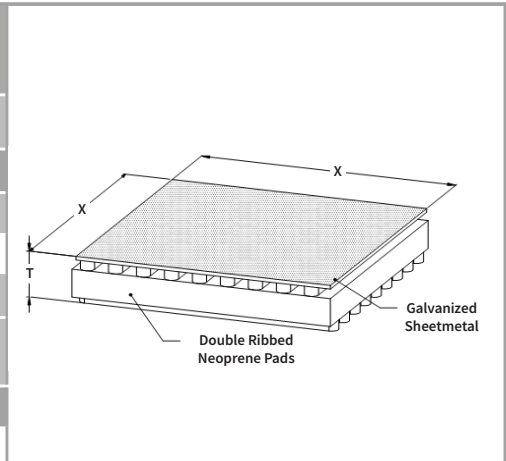

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location	
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	7700 Irvine Centre Drive Suite 800 Irvine, CA, 92618 U.S.A T: 949-788-2930	
Project:		Qty Required:				
Drawing No:		Operating Weight:				
Notes:				www.isotechindustries.com		