

2" Deflection Seismically Rated Floor Mounted Spring Isolator


File No. : ISOCS-IHSSA-2-100-10500

Date: 12/18/15

ISOIN-IHSSA-2-100-1000, Installation Instructions document, to be reviewed for installation

SPECIFICATIONS - 2" DEFLECTION SEISMICALLY RATED FLOOR MOUNTED SPRING ISOLATOR


Model	Rated Load		Rated Deflection		Spring Color	Approx. WT.	
	lbs.	KN	in	mm		lbs.	Kg
IHSSA-2-100	100	0.445	2	50.8	GREY		
IHSSA-2-200	200	0.89	2	50.8	ORANGE		
IHSSA-2-300	300	1.335	2	50.8	YELLOW		
IHSSA-2-400	400	1.78	2	50.8	GREEN		
IHSSA-2-500	500	2.225	2	50.8	WHITE		
IHSSA-2-600	600	2.669	2	50.8	BLACK		
IHSSA-2-800	800	3.559	2	50.8	RED		
IHSSA-2-1000	1000	4.449	2	50.8	BLUE		
IHSSA-2-1500	1500	6.673	2	50.8	BROWN		

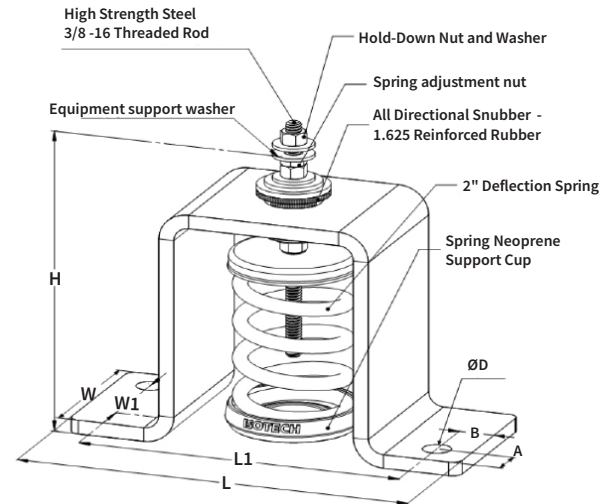

Model					
IHSSA-2-100-1500					
L		W		H	
in	mm	in	mm	in	mm
9 7/8	251	4.0	102	7 3/4	197
L1		W1		Ø D	
in	mm	in	mm	in	mm
8 7/8	207	2 1/4	58	1 1/16	18
A		B		SPRING BOLT ADJUSTMENT	
in	mm	in	mm		
7/8	23	7/8	23	3/8"	

ISOLATOR LOCATIONS


1:	4:
2:	5:
3:	6:

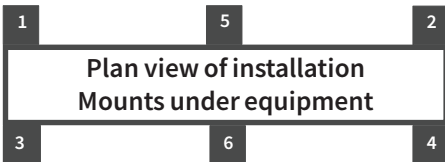

* Anchor capacity is based on 4000 psi reinforce concrete(cracked concrete) with minimum 6" edge distance. Hilti anchors- Type KBTZ - were considered for all calculations. Detailed calculations must be performed if different anchors are used.

Notes:

- Housing and Threaded rod are made of high strength steel. IHSSA-2-100-1000 is designed and manufactured to provide minimum resistance of 1g for lateral seismic load
- Hot-Dip Galvanized finish for Housing to offer maximum corrosion resistance for isolator - Hardware and Spring Compression Cup are zinc -electroplated
- Spring(s) are powder - coated to provide maximum corrosion resistance , and are color-coded for easy identification at site - see table above
- All springs have additional travel to solid equal to 50% of the Rated Deflection with minimum Kx/Ky ratio of 0.85 - All Elements are safe at solid load
- All directional snubber is made of reinforced neoprene and is designed to prevent metal to metal contact. IHSSA-2-100-1000 must be installed so that snubbing elements have 1/8" to 1/4" clearance with housing under operating condition

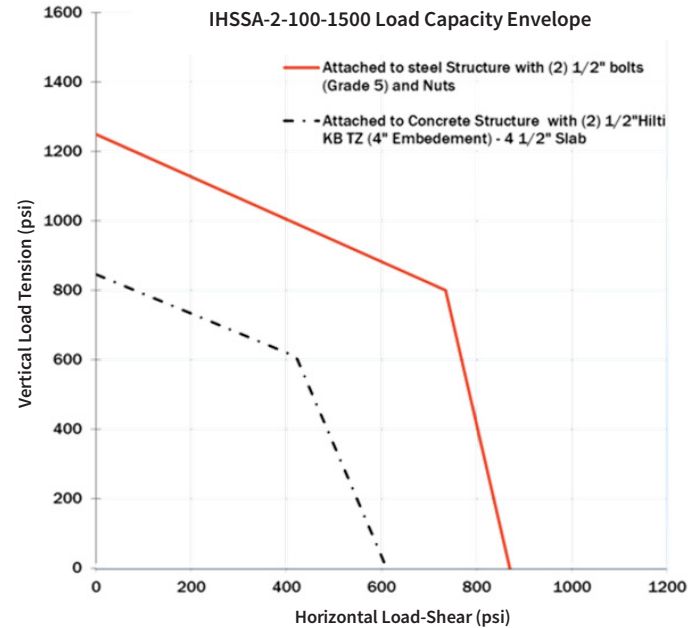

PROJECT INFORMATION		EQUIPMENT INFORMATION		<p>Canada location</p> <p>35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001 www.isotechindustries.com</p> <p>USA Location</p> <p>7700 Irvine Centre Drive Suite 800 Irvine, CA, 92618 U.S.A T: 949-788-2930</p> <p>VISCOMA MEMBER</p>
Customer:		Type:		
Project:		Qty Required:		
Drawing No:		Operating Weight:		
Notes:				

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRY INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.