


Isotech Acoustic Light Box Engineered, designed and manufactured MDF box with fully sealed drywall interior and inlet for electrical connection. Maintains a STC rating by isolating IC rated recessed ceiling lights. Fits most LED, incandescent, CFL and low voltage housing applications.



- Constructed for better Isolation efficiency when compared to double layer 5/8" drywall.
- Green Glue Compound or approved equal noise proofing adhesive used between MDF and drywall layer.
- Fully Sealed with approved Acoustical Sealant.
- UL compliant using Type-X fire rated drywall.
- Recommended to be mounted directly onto isolated ceiling grid, or can be mounted with sound isolated clips.

STC Rating : Restores energy lost from light housing. Final rating dependent on the assembly.


Fire Rating : UL rated acoustic sealant with 5/8" Type-X interior to meet fire code requirements.

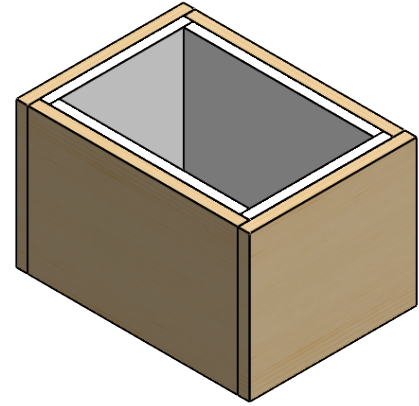


Dimension : IALB ISOTECH ACOUSTIC LIGHT BOX											
W		W1		W2		L		L1		L2	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
10 3/4	273	9 1/4	235	8	203	15	381	13 1/2	343	12 1/4	311
H		H1		H2		T1		T2			
in	mm	in	mm	in	mm	in	mm	in	mm		
9 3/8	238	8 3/8	219	8	203	3/4	19	5/8	16		

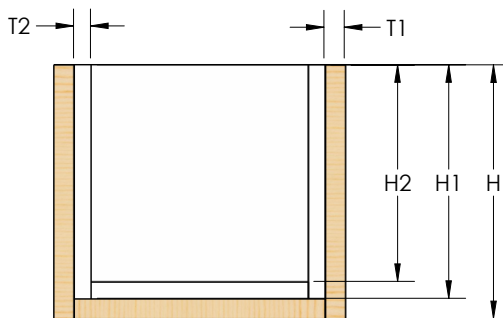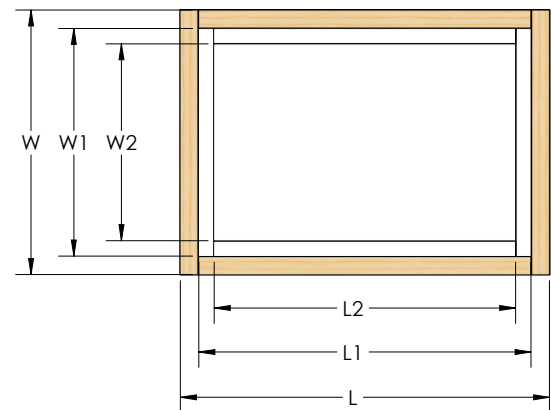

SECTION A-A

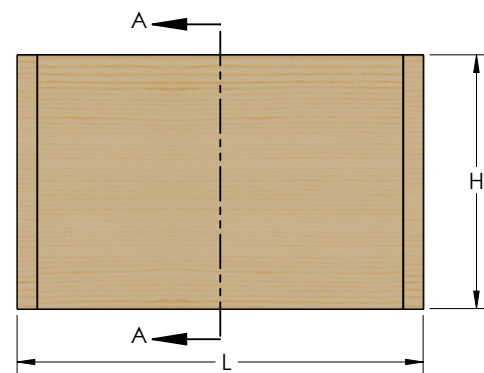

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location	
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930	
Project:		Qty Required:				
Drawing No:		Operating Weight:				
Notes:						

