


SPECIFICATIONS : ICSS-2" DEFLECTION SEISMICALLY RATED RESTRAINED SPRING FOR ATTACHMENT TO STEEL STRUCTURE


Model	Rated Load		Rated Deflection		Spring Color		Approx. WT.	
	lbf.	Kn	in	mm	outer	inner	lbs.	Kg
ICSS-2-100	100	0.445	2.0	50.8	RED	---	25.50	11.57
ICSS-2-200	200	0.89	2.0	50.8	RED	GREY	25.60	11.62
ICSS-2-300	300	1.335	2.0	50.8	RED	ORANGE	25.80	11.71
ICSS-2-400	400	1.78	2.0	50.8	RED	YELLOW	25.90	11.75
ICSS-2-500	500	2.225	2.0	50.8	RED	GREEN	26.00	11.8
ICSS-2-600	600	2.669	2.0	50.8	BROWN	GREY	26.10	11.84
ICSS-2-800	800	3.559	2.0	50.8	BLUE	---	26.30	11.93
ICSS-2-1000	1000	4.449	2.0	50.8	GREEN	---	26.40	11.98
ICSS-2-1200	1200	5.338	2.0	50.8	GREEN	ORANGE	27.00	12.25
ICSS-2-1500	1500	6.673	2.0	50.8	GREY	---	26.80	12.16
ICSS-2-1800	1800	8.007	2.0	50.8	GREY	YELLOW	27.30	12.39
ICSS-2-2000	2000	8.897	2.0	50.8	GREY	WHITE	26.90	12.21
ICSS-2-2300	2300	9.787	2.0	50.8	GREY	RED	27.50	12.48
ICSS-2-2500	2500	11.121	2.0	50.8	ORANGE	---	27.10	12.3
ICSS-2-2800	2800	12.455	2.0	50.8	ORANGE	YELLOW	27.90	12.66
ICSS-2-3000	3000	13.345	2.0	50.8	BLACK	---	27.50	12.48
ICSS-2-3500	3500	15.569	2.0	50.8	BLACK	WHITE	28.30	12.84
ICSS-2-3800	3800	16.904	2.0	50.8	BLACK	RED	28.70	13.02
ICSS-2-4000	4000	17.793	2.0	50.8	BLACK	BLUE	28.90	13.11
ICSS-2-4500	4500	20.017	2.0	50.8	BLACK	BROWN	38.20	17.33

Model						
DIMENSION : ICSS-2-100-4500						
L1		W1		H		
in	mm	in	mm	in	mm	
11	279	5 1/2	143	5 1/2	150	
T		W2		ø D		
in	mm	in	mm	in	mm	
1/2	13	3 1/4	80	1 1/4	18	
ø d		M		N		
in	mm	in	mm	in	mm	
1/4	15	3/8	93	1	26	
a		b		Spring Adjustment Bolt		
in	mm	in	mm			
1 1/4	32	1 1/4	32	5/8"		

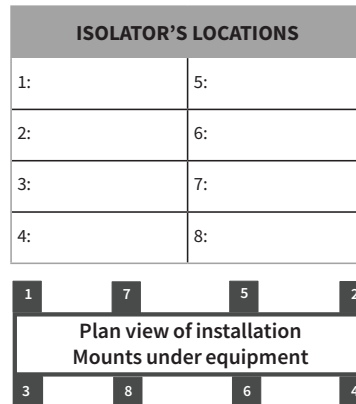


Notes:

- ICSS-2-100-4500 isolators are all Pre-Compressed to allow the lowest overall installation height and to offer significant labor saving during installation
- All springs have additional travel to solid equal to 50% of the Rated Deflection with minimum Kx/Ky ratio of 1.0 - All Elements are safe at solid load
- Spring(s) are powder - coated to provide maximum corrosion resistance , and are color-coded for easy identification at site - see table above
- Hot-Dip Galvanized finish for Housing to offer maximum corrosion resistance for isolator - Hardware and Spring Compression Cup are zinc -electroplated
- ICSS-2-100-4500 isolators are designed to allow replacement of reinforced rubber snubber without disturbing equipment. Reinforced rubber snubbers are installed to prevent metal to metal contact
- 1/2" THK plate, with the same dimensions of isolator top plate, must be installed on top of isolator, when less than 80% of isolator's top plate is covered

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location	
Customer:		Type:		35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930	
Project:		Qty Required:				
Drawing No:		Operating Weight:				
Notes:						

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.

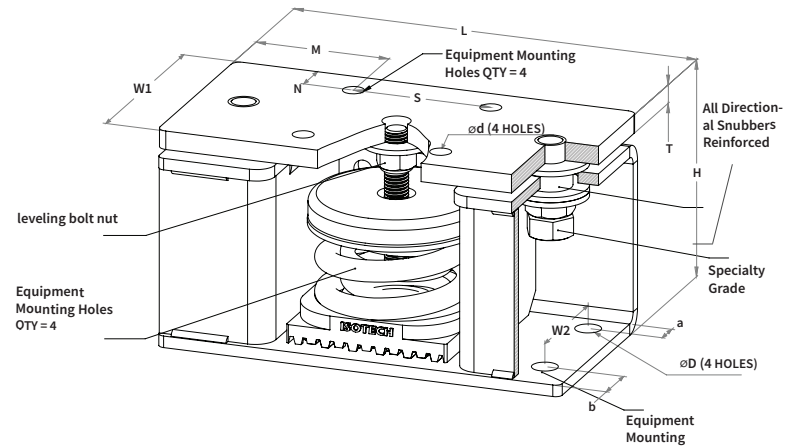

* Load Capacity Envelope: Concrete loads are based on 4000 psi reinforced concrete with minimum 6" edge distance and can be considered for non seismic applications only.

ICSS-2-100-4500 Load Capacity Envelope -Attached to Steel Structure

