

ICSS-3 SEISMICALLY RATED ISOLATOR ATTACHMENT TO STEEL STRUCTURE


File No.: ISOCS-ICSS-3-100-4500

Date: 12/27/15

ISOIN-ICSS-3-100-4500, Installation instructions Document, to be Reviewed for Installation


SPECIFICATIONS : ICSS-3" SEISMICALLY RATED ISOLATOR ATTACHMENT TO STEEL STRUCTURE

Model	Rated Load		Rated Deflection		Spring Color		Approx. WT.	
	lb.f.	Kn	in	mm	outer	inner	lbs.	Kg
ICSS-3-100	100	0.445	3.0	76.2	YELLOW	---	46.50	21.1
ICSS-3-200	200	0.89	3.0	76.2	YELLOW	BROWN	47.00	21.31
ICSS-3-300	300	1.335	3.0	76.2	GREEN	---	46.90	21.28
ICSS-3-400	400	1.78	3.0	76.2	GREEN	BROWN	47.40	21.51
ICSS-3-500	500	2.225	3.0	76.2	BLUE	---	47.10	21.37
ICSS-3-600	600	2.669	3.0	76.2	BLUE	BROWN	47.50	21.55
ICSS-3-800	800	3.559	3.0	76.2	WHITE	---	47.00	21.32
ICSS-3-1000	1000	4.449	3.0	76.2	ORANGE	---	47.30	21.46
ICSS-3-1200	1200	5.338	3.0	76.2	ORANGE	BLACK	47.80	21.69
ICSS-3-1500	1500	6.673	3.0	76.2	BLACK	---	47.80	21.69
ICSS-3-1800	1800	8.007	3.0	76.2	ORANGE	GREY	48.00	21.78
ICSS-3-2000	2000	8.897	3.0	76.2	RED	---	47.50	21.55
ICSS-3-2300	2300	9.787	3.0	76.2	BLACK	GREY	48.10	21.82
ICSS-3-2500	2500	11.121	3.0	76.2	GREY	---	48.00	21.78
ICSS-3-2800	2800	12.455	3.0	76.2	BLACK	GREY	48.80	21.14
ICSS-3-3000	3000	13.345	3.0	76.2	BROWN	---	48.50	22.00
ICSS-3-3500	3500	15.569	3.0	76.2	BROWN	YELLOW	49.20	22.32
ICSS-3-3800	3800	16.904	3.0	76.2	BROWN	GREY	49.40	22.41
ICSS-3-4000	4000	17.793	3.0	76.2	BROWN	RED	49.62	22.51
ICSS-3-4500	4500	20.017	3.0	76.2	BROWN	BLUE	52.00	23.59

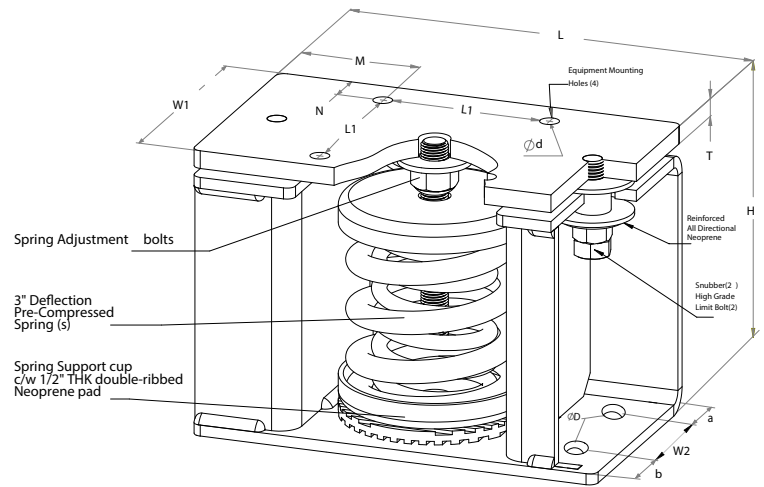


* Load Capacity Envelope: Concrete loads are based on 4000 psi reinforced concrete with minimum 6" edge distance and can be considered for non seismic applications only.

ICSS-3-100-4500 LOAD CAPACITY ENVELOPE

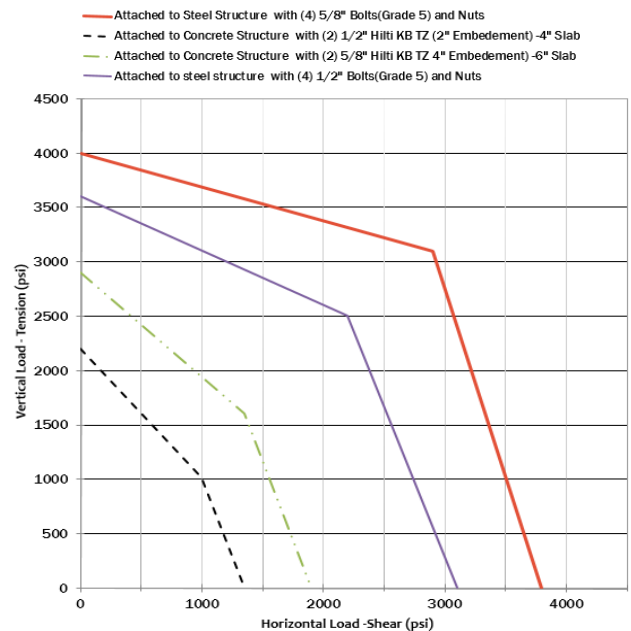


Model					
DIMENSION : ICSS-3-100-4500					
L		W1		H	
in	mm	in	mm	in	mm
11 1/2	293	6 1/16	167	8 1/16	205
T		W2		ø D	
in	mm	in	mm	in	mm
1/2	13	3 1/2	89	1/2	13
ø d		M		N	
in	mm	in	mm	in	mm
1/16	15	3 3/8	86	1 1/16	27
a		b		SPRING ADJUSTMENT BOLT	
in	mm	in	mm		
1 1/16	43	1 3/8	36	3/4"	

ISOLATOR'S LOCATIONS			
1:		5:	
2:		6:	
3:		7:	
4:		8:	

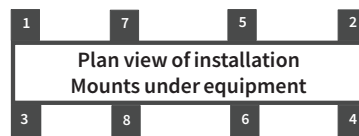

Notes:

- ICSS-3-100-4500 isolators are all Pre-compressed to allow the lowest overall installation height and to offer significant labor saving during installation
- All springs have additional travel to solid equal to 50% of the Rated Deflection with minimum Kx/Ky ratio of 1.0 - All Elements are safe at solid load
- Spring(s) are powder - coated to provide maximum corrosion resistance , and are color-coded for easy identification at site - see table above
- Hot-Dip Galvanized finish for Housing to offer maximum corrosion resistance for isolator - Hardware and Spring Compression Cup are zinc -electroplated
- ICSS-3-100-4500 isolators are designed to allow replacement of reinforced rubber snubber without disturbing equipment. Reinforced rubber snubbers are installed to prevent metal to metal contact
- 1/2" THK plate, with the same dimensions of isolator top plate, must be installed on top of isolator, when less than 80% of isolator's top plate is covered

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location	
Customer:		Type:		35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930	
Project:		Qty Required:				
Drawing No:		Operating Weight:				
Notes:						