

IHA-1 ISOTECH SPRING HANGER

File No. : ISOCS-IHA-1-30-600


Date: 09/15/15

ISOIN-IHA-1-30-600, Installation Instructions Document, to be Reviewed for Installation

SPECIFICATIONS : IHA-1" DEFLECTION ISOTECH SPRING HANGER

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	Lbf.	Kn	in	mm		Lbs.	Kg
IHA-1-30	30	0.134	1	25.4	YELLOW	1.60	0.73
IHA-1-50	50	0.223	1	25.4	GREEN	1.60	0.73
IHA-1-100	100	0.445	1	25.4	BLACK	1.70	0.78
IHA-1-150	150	0.668	1	25.4	RED	1.70	0.78
IHA-1-200	200	0.89	1	25.4	BLUE	1.80	0.82
IHA-1-300	300	1.335	1	25.4	WHITE	1.90	0.87
IHA-1-400	400	1.78	1	25.4	BROWN	2.05	0.93
IHA-1-500	500	2.225	1	25.4	ORANGE	2.10	0.96
IHA-1-600	600	2.669	1	25.4	GREY	2.20	1.00

HARDWARE NOT INCLUDED - SPRING CUP: ZINC PLATED

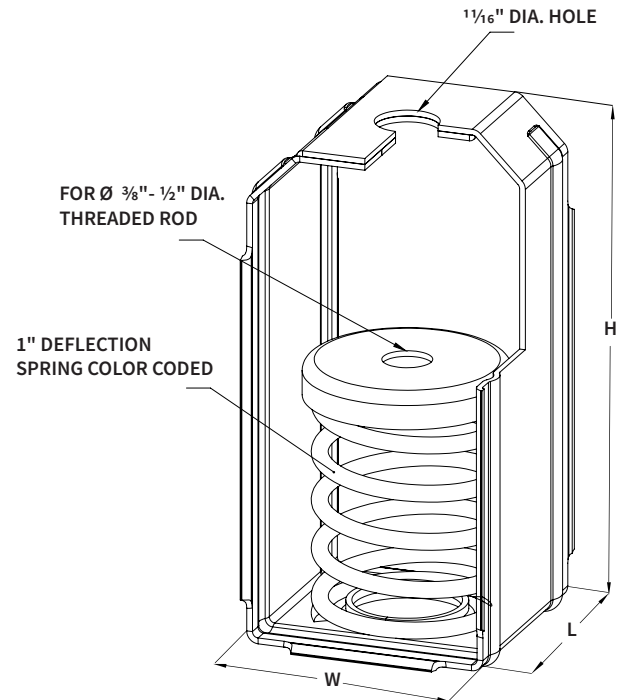


Dimension : IHA -1" DEFLECTION ISOTECH SPRING HANGER

Model	H		W		L	
	in	mm	in	mm	in	mm
IHA-1-30-600	5 3/4	147	2 5/8	67	2 1/2	64

ISOLATOR'S LOCATIONS

1:	5:
2:	6:
3:	7:
4:	8:

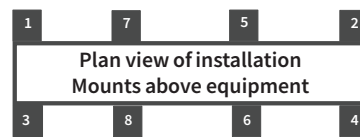

Notes:

- Housing is powder – coated and designed to allow 30° misalignment for hanger rod
- Springs are powder – coated for maximum corrosion protection, and are designed to have minimum 50% over travel

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 www.isotechindustries.com	

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.