


SPECIFICATION : NEOPRENE CEILING RUBBER HANGER (5MM DEFLECTION AT RATED LOAD)

Model	RATED LOAD		DIMENSIONS						HARDWARE COLOR	APPROX. WT.	
	Lbf.	Kn.	A		B		C			Lbs.	Kg
			In	mm	In	mm	In	mm			
IRH-50-110	50 - 110	22 - 50							SILVER		
IRH-120-160	120 - 160	53 - 72	1 ¾	35	1 ¼	32	3 ⅝	92	GOLD	0.14	0.06



IRH-50-110
SILVER

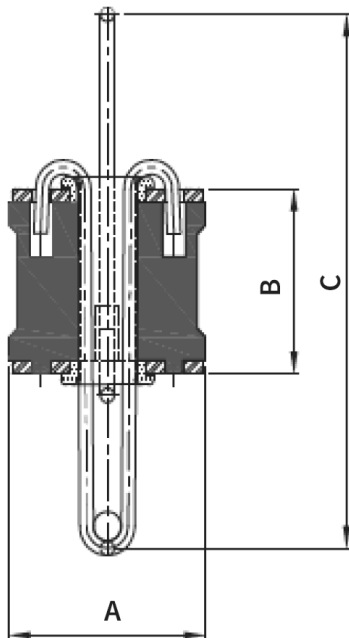

IRH-120-160
GOLD

Notes:

- IRH neoprene ceiling rubber hangers provide vibration isolation for ceiling grids and decouples ceiling system from building structure. IRH hangers are designed to provide 5.0 mm static deflection under the rated load and included connection wires at top and bottom for quick and easy installation
- Natural frequency of IRH hanger under the rated load is 7Hz.

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 www.isotechindustries.com	

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.