


SPECIFICATIONS: ISPH ISOTECH SEISMIC PIPE HANGER

Model	A (MAX)		C		D		B		ØP		Ød		Approx. WT.	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	Kg
ISPH-2.5	¼	6	4 ⅛	105	2 1 ⅛	68	⅝	10	2.5	65	0.53	13	2.75	1.25
ISPH-3	¼	6	4 ¾	112	3 ¼	83	½	12	3	75	0.53	13	2.75	1.25
ISPH-4	¼	6	5 ¼	134	3 ¾	95	½	12	4	100	0.53	13	7.5	3.55
ISPH-5	¼	6	6 ¼	159	4 ⅛	105	½	12	5	125	0.53	13	9.75	4.4
ISPH-6	¼	6	6 ⅞	175	4 ¾	111	⅝	16	6	150	0.69	18	11.25	5.25
ISPH-8	¼	6	8 ½	216	5 ¾	146	⅝	16	8	200	0.69	18	13.25	6.12
ISPH-10	¼	6	9 ¾	248	7 ⅝	188	⅝	16	10	250	1*	26*	21.75	10
ISPH-12	¼	6	10 ⅞	277	8 ¼	210	⅝	16	12	300	1*	26*	23.75	11
ISPH-14	¼	6	11 ⅜	289	8 ¾	223	⅝	16	14	355	1*	26*	25.5	12
ISPH-16	¼	6	12 ¼	308	9 ¼	235	⅝	16	16	405	1-25*	32*	32*	15

* Bracket side hole Dia. is 0.69 for restraint attachment

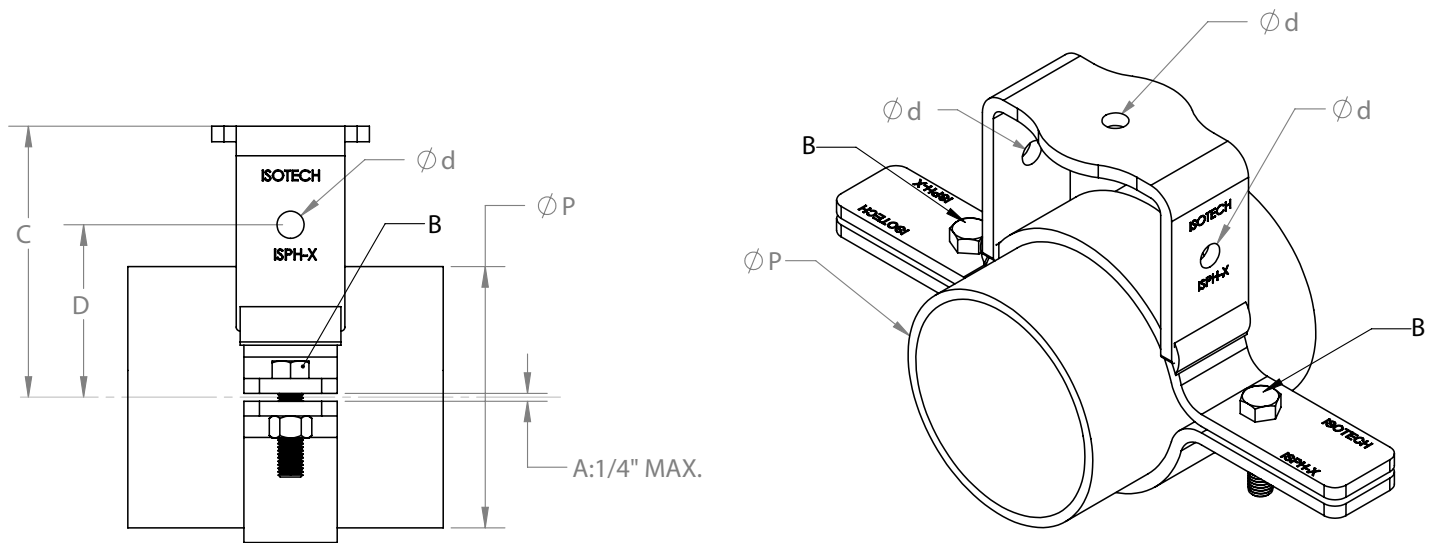

Notes:

- Seismic Pipe Hangers are made of high yield/strength steel material
- Seismic Pipe Hangers are zinc plated for corrosion resistance
- Seismic Pipe Hangers are available for all pipe sizes, contact factory for more details

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location	
Customer:		Type:		35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930	
Project:		Qty Required:				
Drawing No:		Operating Weight:				
Notes:						

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.