

H		CLEARANCE		FLANGE WIDTH	
in	mm	in	mm	in	mm
6	152	1 ½	39	1 7/8	48
8	203			2 ¼	58
10	254			2 5/8	67
12	305			3	77


DIMENSIONS : CONCRETE INERTIA BASE FOR NON-SEISMIC APPLICATIONS

MODEL	L		W		H	
	in	mm	in	mm	in	mm
ICIB-S-MB						

ISOLATOR'S LOCATIONS	
1:	5:
2:	6:
3:	7:
4:	8:


RECOMMENDED HOUSE KEEPING PAD DIMENSIONS FOR NON-SEISMIC APPLICATION

L1		W1		H1	
in	mm	in	mm	in	mm

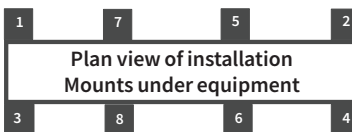

Notes:

- ICIB-NS is constructed from structural steel channels and incorporate standard steel reinforcing rods to provide reinforced concrete inertia base
- ICIB-NS frame to be filled with Minimum 3000 psi concrete
- House Keeping Pad should be constructed with minimum 3000 psi concrete and should be reinforced. House keeping pad is designed by others.
- ICIB-NS is Powder-Coated to Provide Maximum Corrosion Protection, ICIB-NS with Bolt Template (Pre-located equipment anchor bolt) available upon request.
- Concrete is not supplied by ISOTECH Industries Inc.

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 www.isotechindustries.com	