
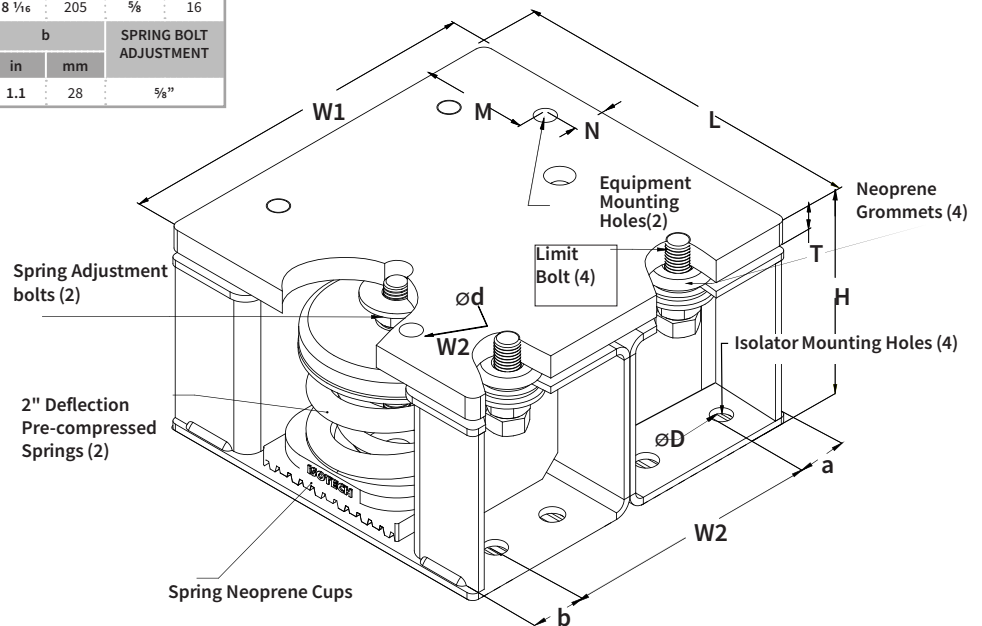


**SPECIFICATIONS : ICSN-2" DEFLECTION ISOTECH COOLING TOWER/CHILLER NON-SEISMIC  
RESTRAINED SPRING**

Model	Rated Load		Rated Deflection		Spring Color		Approx. WT.	
	lbf.	kN	in	mm	outer	inner	lbs	kg
ICSN-2-5000	5000	22.241	2.0	50.8	ORANGE	---	47.80	21.68
ICSN-2-5600	5600	24.91	2.0	50.8	ORANGE	YELLOW	48.00	21.77
ICSN-2-6000	6000	26.69	2.0	50.8	BLACK	---	48.20	21.86
ICSN-2-6600	6600	29.359	2.0	50.8	BLACK	YELLOW	48.80	22.14
ICSN-2-7000	7000	31.138	2.0	50.8	BLACK	WHITE	49.00	22.23
ICSN-2-7600	7600	33.807	2.0	50.8	BLACK	RED	49.60	22.50
ICSN-2-8000	8000	35.586	2.0	50.8	BLACK	BLUE	50.00	22.68
ICSN-2-9000	9000	40.034	2.0	50.8	BLACK	BROWN	51.00	23.13

Model											
DIMENSION : ICSN-2-5000-9000											
L		W1		H		T		W2		øD	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
9 7/8	251	10 1/4	261	5 11/16	145	7/8	16	8 1/16	205	7/8	16
ød		M		N		a		b		SPRING BOLT ADJUSTMENT	
in	mm	in	mm	in	mm	in	mm	in	mm	%	
3/16	15	3.0	77	1.0	26	1.1	28	1.1	28	3/8"	

ISOLATOR'S LOCATIONS	
1:	5:
2:	6:
3:	7:
4:	8:



- Notes:**
- ICSN-2-5000-9000 Isolators are all Pre-Compressed to allow the lowest overall installation height and to offer significant labor saving during installation
  - All springs have additional travel to solid equal to 50% of the Rated Deflection with minimum Kx/Ky ratio of 1.0 - All Elements are safe at solid load
  - Spring(s) are powder - coated to provide maximum corrosion resistance , and are color-coded for easy identification at site - see table above
  - Hot-Dip Galvanized finish for Housing to offer maximum corrosion resistance for isolator -Hardware and Spring Compression Cup are zinc -electroplated
  - ICSN-2-5000-9000 isolators are designed to allow replacement of Neoprene grommet without disturbing equipment. Neoprene grommet are installed to prevent metal to metal contact.
  - Same Thickness and dimensions of isolator top plate, must be installed on top of isolator, when less than 80% of isolator's top plate is covered.

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 <a href="http://www.isotechindustries.com">www.isotechindustries.com</a>	

