

## IHA-1 ISOTECH SPRING HANGER

File No. : ISOCS-IHA-1-30-600


Date: 09/15/15

ISOIN-IHA-1-30-600, Installation Instructions Document, to be Reviewed for Installation

### SPECIFICATIONS : IHA-1" DEFLECTION ISOTECH SPRING HANGER

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHA-1-30	30	0.134	1	25.4	YELLOW	1.60	0.73
IHA-1-50	50	0.223	1	25.4	GREEN	1.60	0.73
IHA-1-100	100	0.445	1	25.4	BLACK	1.70	0.78
IHA-1-150	150	0.668	1	25.4	RED	1.70	0.78
IHA-1-200	200	0.89	1	25.4	BLUE	1.80	0.82
IHA-1-300	300	1.335	1	25.4	WHITE	1.90	0.87
IHA-1-400	400	1.78	1	25.4	BROWN	2.05	0.93
IHA-1-500	500	2.225	1	25.4	ORANGE	2.10	0.96
IHA-1-600	600	2.669	1	25.4	GREY	2.20	1.00

HARDWARE NOT INCLUDED - SPRING CUP: ZINC PLATED

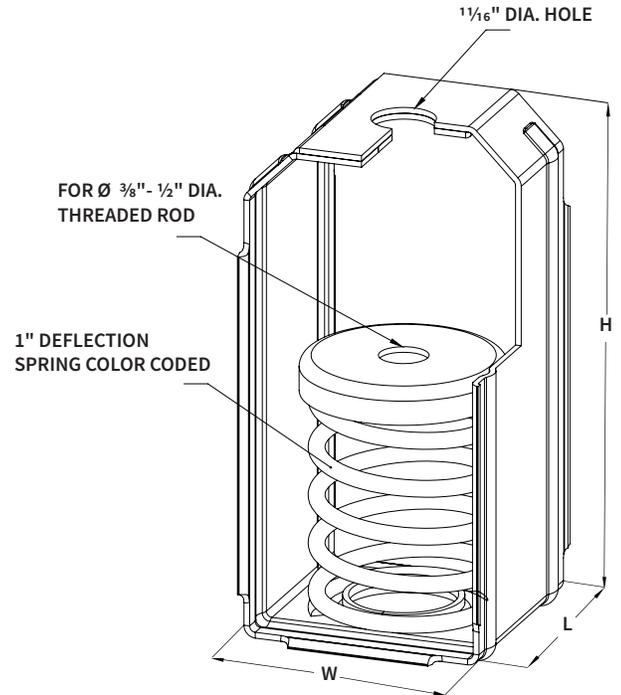


### Dimension : IHA -1" DEFLECTION ISOTECH SPRING HANGER

Model	H		W		L	
	in	mm	in	mm	in	mm
IHA-1-30-600	5 ¾	147	2 ½	67	2 ½	64

### ISOLATOR'S LOCATIONS

1:	5:
2:	6:
3:	7:
4:	8:

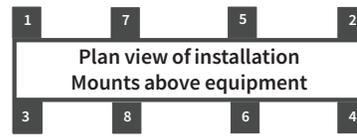

### Notes:

- Housing is powder – coated and designed to allow 30° misalignment for hanger rod
- Springs are powder – coated for maximum corrosion protection, and are designed to have minimum 50% over travel

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 <a href="http://www.isotechindustries.com">www.isotechindustries.com</a>	

