

IHS-1 ISOTECH SPRING HANGER IN-LINE

File No. : ISOCS-IHS-1-15-200


Date: 09/15/15

ISOIN-IHS-1-15-200, Installation Instructions Document, to be Reviewed for Installation

SPECIFICATIONS : IHS-1" DEFLECTION ISOTECH SPRING HANGER IN-LINE

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHS-1-15	15	0.067	1.0	25.4	GREY	0.70	0.32
IHS-1-30	30	0.134	1.0	25.4	BLACK	0.71	0.33
IHS-1-50	50	0.223	1.0	25.4	RED	0.73	0.34
IHS-1-75	75	0.334	1.0	25.4	WHITE	0.73	0.34
IHS-1-100	100	0.445	1.0	25.4	YELLOW	0.75	0.35
IHS-1-125	125	0.557	1.0	25.4	BLUE	0.78	0.36
IHS-1-150	150	0.668	1.0	25.4	ORANGE	0.80	0.37
IHS-1-200	200	0.890	1.0	25.4	BROWN	0.81	0.37

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED

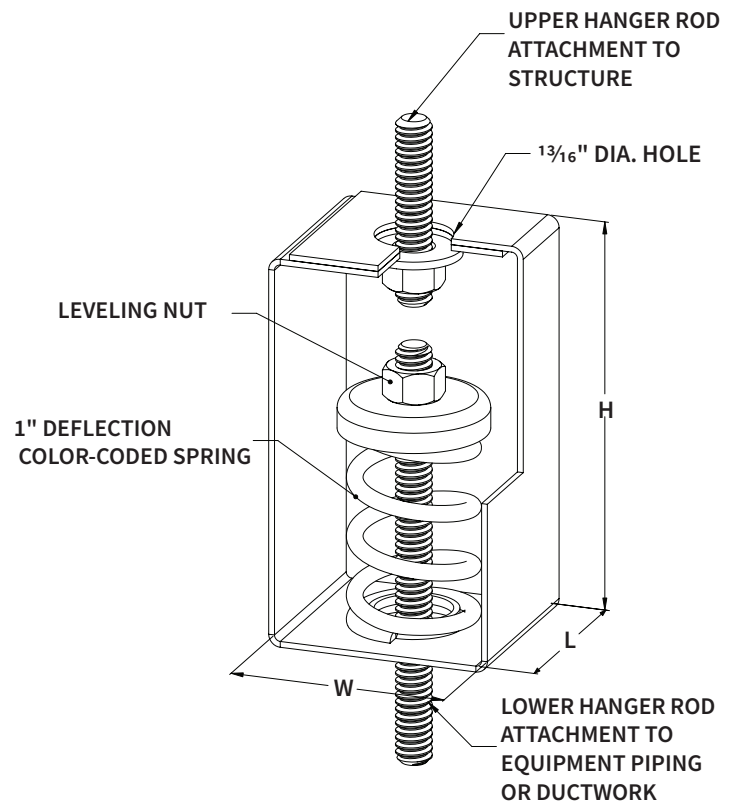


Dimension : IHS-1" DEFLECTION ISOTECH SPRING HANGER IN-LINE

Model	H		W		L	
	in	mm	in	mm	in	mm
IHS-15-200	4 1/2	115	2 3/8	61	2 1/16	53

ISOLATOR'S LOCATIONS


1:	5:
2:	6:
3:	7:
4:	8:

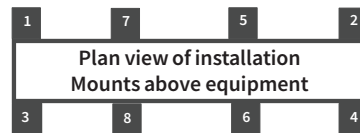

Notes:

- Housing is designed to allow 15° misalignment for hanger rod
- Spring and Housing are powder-coated for maximum corrosion protection, and are designed to have minimum 50% over travel under rated load

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:					



Tool free : 1-888-831-3311
www.isotechindustries.com

