

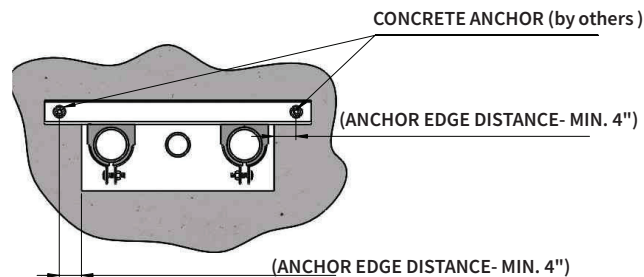


Notes:

- ISOTECH IPGC-XXX Copper Pipe Guides are designed to allow pipe thermal growth, while preventing lateral movement during pipe expansion.
- IPGC-XXX includes a thermoplastic elastomer to absorb shock and vibration, reduce noise and avoid galvanic corrosion.
- The TPE (thermoplastic elastomer) inserts are designed with a living hinge to allow for quick installation and relocation of the cushion and pipe.
- TPE has a temperature range of -50 to 275 °F (-46 to 135 °C), will not corrode, is oil resistant and is non-conducting.
- ISOTECH IPGC-XXX Copper Pipe Guides are to be used with P1000 struts (1-5/8" x 1-5/8") as shown strut by others.
- IPGC-XXX includes electro galvanized clamp and hardware.

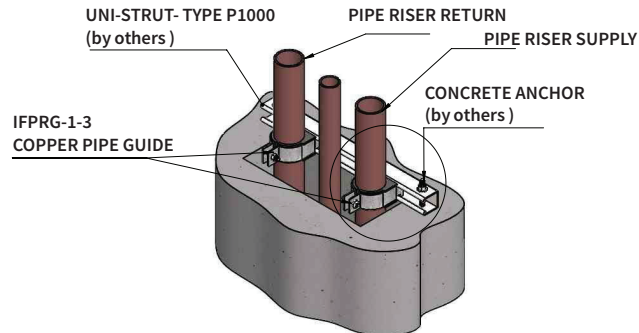

DETAIL B


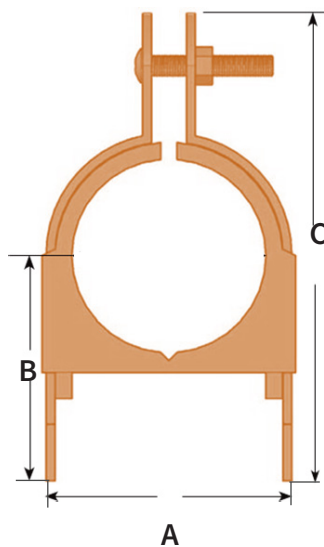
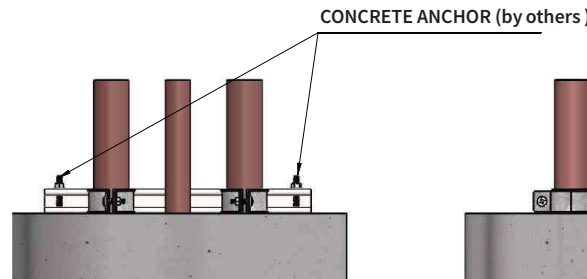


Fig 1.




Fig 2.





Fig 3.

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:					



Tool free : 1-888-831-3311
www.isotechindustries.com

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.