


SPECIFICATION : NEOPRENE CEILING RUBBER HANGER (5MM DEFLECTION AT RATED LOAD)

| Model | RATED LOAD | | DIMENSIONS | | | | | | HARDWARE COLOR | APPROX. WT. | |
|-------------|------------|---------|------------|----|-----|----|-----|----|----------------|-------------|------|
| | lbf. | kN | A | | B | | C | | | lbs. | kg |
| | | | in | mm | in | mm | in | mm | | | |
| IRH-50-110 | 50 - 110 | 22 - 50 | | | | | | | SILVER | | |
| IRH-120-160 | 120 - 160 | 53 - 72 | 1 ¾ | 35 | 1 ¼ | 32 | 3 ⅝ | 92 | GOLD | 0.14 | 0.06 |



IRH-50-110
SILVER

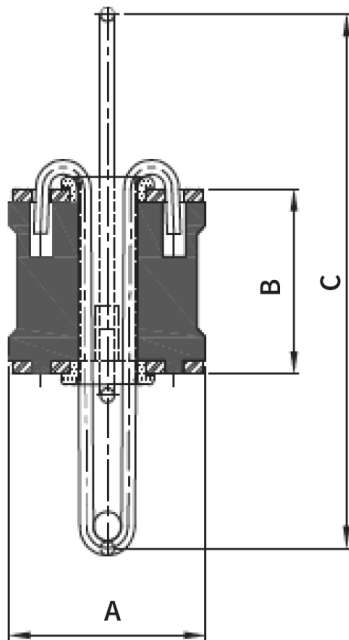

IRH-120-160
GOLD

Notes:

- IRH neoprene ceiling rubber hangers provide vibration isolation for ceiling grids and decouples ceiling system from building structure. IRH hangers are designed to provide 5.0 mm static deflection under the rated load and included connection wires at top and bottom for quick and easy installation
- Natural frequency of IRH hanger under the rated load is 7Hz.

| PROJECT INFORMATION | | EQUIPMENT INFORMATION | | Canada location | USA Location |
|---------------------|--|-----------------------|--|--|---|
| Customer: | | Type: | | 35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001 | 3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930 |
| Project: | | Qty Required: | | | |
| Drawing No: | | Operating Weight: | | | |
| Notes: | | | | Tool free : 1-888-831-3311 www.isotechindustries.com | |