

## IHB-2 ISOTECH SPRING HANGER

File No. : ISOCS-IHB-2-30-1500


Date: 09/15/15

ISOIN-IHB-2-30-1500, Installation Instructions Document,  
to be Reviewed for Installation

### SPECIFICATIONS : IHB-2" DEFLECTION ISOTECH SPRING HANGER

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHB-2-30	30	0.133	2.0	50.8	PINK	4.15	1.88
IHB-2-50	50	0.222	2.0	50.8	PURPLE	4.30	1.95
IHB-2-100	100	0.445	2.0	50.8	GREY	4.41	2.01
IHB-2-200	200	0.89	2.0	50.8	ORANGE	4.58	2.08
IHB-2-300	300	1.335	2.0	50.8	YELLOW	4.65	2.11
IHB-2-400	400	1.78	2.0	50.8	GREEN	4.80	2.18
IHB-2-500	500	2.225	2.0	50.8	WHITE	4.85	2.2
IHB-2-600	600	2.669	2.0	50.8	BLACK	4.90	2.23
IHB-2-800	800	3.559	2.0	50.8	RED	5.13	2.33
IHB-2-1000	1000	4.449	2.0	50.8	BLUE	5.20	2.36
IHB-2-1500	1500	6.673	2.0	50.8	BROWN	5.25	2.39

HARDWARE NOT INCLUDED - SPRING CUP: ZINC PLATED

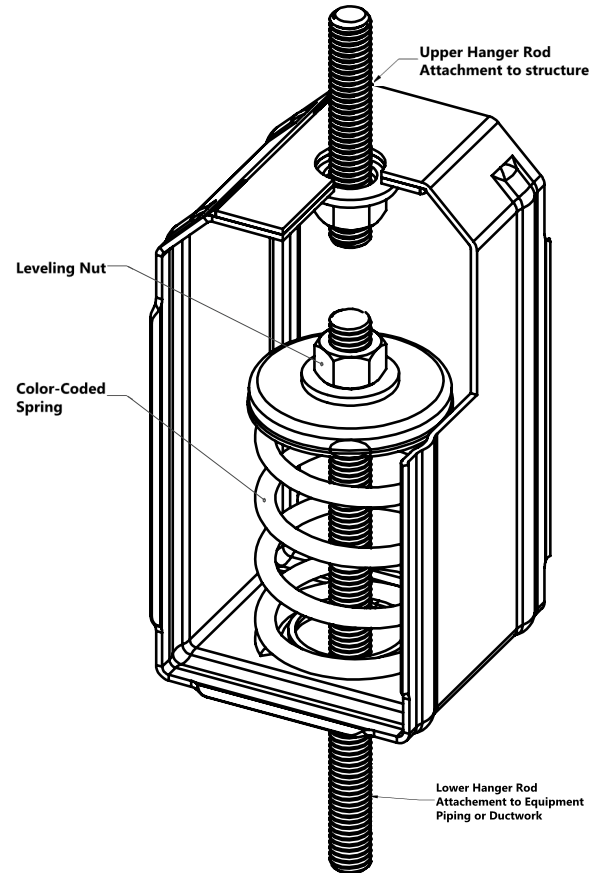


### Dimension : IHB-2" DEFLECTION ISOTECH SPRING HANGER

Model	H		W		L	
	in	mm	in	mm	in	mm
IHB-2-30-1500	8 1/2	216	4 1/4	108	4 3/8	112

### ISOLATOR'S LOCATIONS

1:	5:
2:	6:
3:	7:
4:	8:

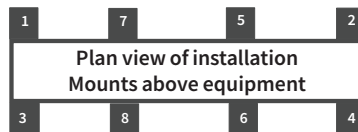

### Notes:

- Housing is powder – coated and designed to allow 30° misalignment for hanger rod
- Springs are powder – coated for maximum corrosion protection, and are designed to have minimum 50% over travel

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 <a href="http://www.isotechindustries.com">www.isotechindustries.com</a>	