

IHND-1GEE ISOTECH DOUBLE DEFLECTION **ELASTOMER ISOLATOR - DOUBLE ELEMENT**

File No.: ISOCS-IHND-1GEE-15-600

Date: 09/16/18


ISOIN-IHND-1GEE-15-600, Installation Instructions Document, to be Reviewed for Installation

SPECIFICATIONS: IHND-1GEE ISOTECH DOUBLE DEFLECTION ELASTOMER ISOLATOR - DOUBLE ELEMENT


Model	Rated Load			Element
	lbf.	kN	Rated Deflection	Color
IHND-1GEE-RED	15 to 100	6.8 to 45.5	See graphs for details	RED
IHND-1GEE-BLUE	105 to 250	48 to 113.5	See graphs for details	BLUE
IHND-1GEE-BLACK	275 to 400	125 to 181.5	See graphs for details	BLACK
IHND-1GEE-GREEN	405 to 500	183 to 227	See graphs for details	GREEN
IHND-1GEE-YELLOW	510 to 600	231 to 272	See graphs for details	YELLOW

Double-Deflection Neoprene Element	
Hold-down Nut & Washe Double-Defle Neoprene Ele	ection
1/4" EYE BOLT	
1/4" EYEBOLT	

Model							
Dimension: IHND-1GEE-15-600							
I	_	V	W H		Approx. Wt.		
in	mm	in	mm	in	mm	Lbs.	Kg.
25/8	67	2 11/16	68	4 1/16	104	1	0.45





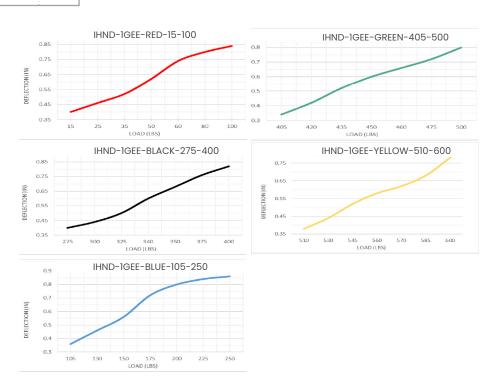

PROJECT INFORMATION	EQUIPMENT INFORMATION	Canada location	USA Location
Customer:	Туре:	35 Silton Road	3021 E Coronado St.
Project:	Qty Required:	Woodbridge ON L4L 7Z8 CANADA	Anaheim, CA.,92806 U.S.A
Drawing No:	Operating Weight:	T: 905-856-5001	T: 949-788-2930
Notes:	<u>'</u>		free: 1-888-831-3311



www.isotechindustries.com

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.