IHS-1 ISOTECH SPRING HANGER IN-LINE

File No. : ISOCS-IHS-1-15-200 Date: 09/15/15

ISOIN-IHS-1-15-200, Installation Instructions Document, to be Reviewed for Installation

SPECIFICATIONS : IHS-1" DEFLECTION ISOTECH SPRING HANGER IN-LINE

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHS-1-15	15	0.067	1.0	25.4	GREY	0.70	0.32
IHS-1-30	30	0.134	1.0	25.4	BLACK	0.71	0.33
IHS-1-50	50	0.223	1.0	25.4	RED	0.73	0.34
IHS-1-75	75	0.334	1.0	25.4	WHITE	0.73	0.34
IHS-1-100	100	0.445	1.0	25.4	YELLOW	0.75	0.35
IHS-1-125	125	0.557	1.0	25.4	BLUE	0.78	0.36
IHS-1-150	150	0.668	1.0	25.4	ORANGE	0.80	0.37
IHS-1-200	200	0.890	1.0	25.4	BROWN	0.81	0.37

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED

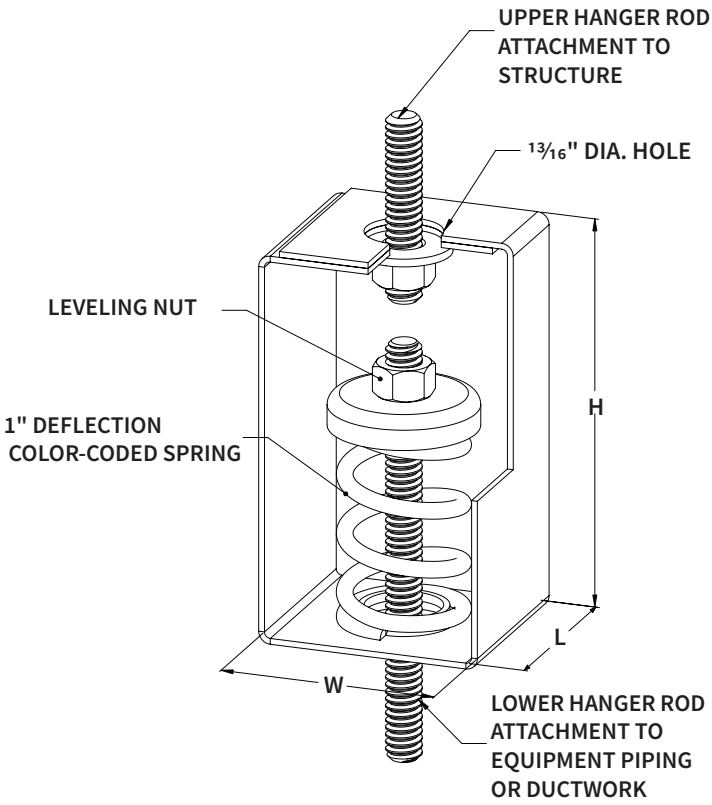

Dimension : IHS-1" DEFLECTION ISOTECH SPRING HANGER IN-LINE

Model	H		W		L	
	in	mm	in	mm	in	mm
IHS-15-200	4 ½	115	2 ⅜	61	2 1⁄16	53

ISOLATOR'S LOCATIONS	
1:	5:
2:	6:
3:	7:
4:	8:

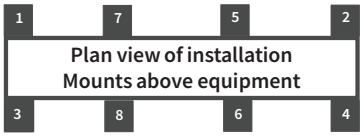

Notes:

- Housing is designed to allow 15˚ misalignment for hanger rod
- Spring and Housing are powder – coated for maximum corrosion protection, and are designed to have minimum 50%over travel under rated load

PROJECT INFORMATION		EQUIPMENT INFORMATION	
Customer:		Type:	
Project:		Qty Required:	
Drawing No:		Operating Weight:	
Notes:			

Canada location

35 Silton Road
Woodbridge ON
L4L 7Z8 CANADA
T: 905-856-5001

USA Location

3021 E Coronado St.
Anaheim, CA.,92806
U.S.A
T: 949-788-2930

Tool free : 1-888-831-3311
www.isotechindustries.com

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.