

IHSC-1 SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

File No. : ISOCS-IHSC-1-15-200

Date: 09/15/15

ISOIN-IHSC-1-15-200, Installation Instructions Document, to be Reviewed for Installation


SPECIFICATIONS - IHSC-1" DEFLECTION SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHSC-1-15	15	0.067	1.0	25.4	GREY	0.70	0.32
IHSC-1-30	30	0.134	1.0	25.4	BLACK	0.71	0.33
IHSC-1-50	50	0.223	1.0	25.4	RED	0.73	0.34
IHSC-1-75	75	0.334	1.0	25.4	WHITE	0.73	0.34
IHSC-1-100	100	0.445	1.0	25.4	YELLOW	0.75	0.35
IHSC-1-125	125	0.557	1.0	25.4	BLUE	0.78	0.36
IHSC-1-150	150	0.668	1.0	25.4	ORANGE	0.80	0.37
IHSC-1-200	200	0.89	1.0	25.4	BROWN	0.81	0.37

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED


Dimension : IHSC-1" DEFLECTION SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

Model	H		W		L	
	in	mm	in	mm	in	mm
IHSC-1-15-200	4 1/2	115	2 3/8	61	2 1/16	53

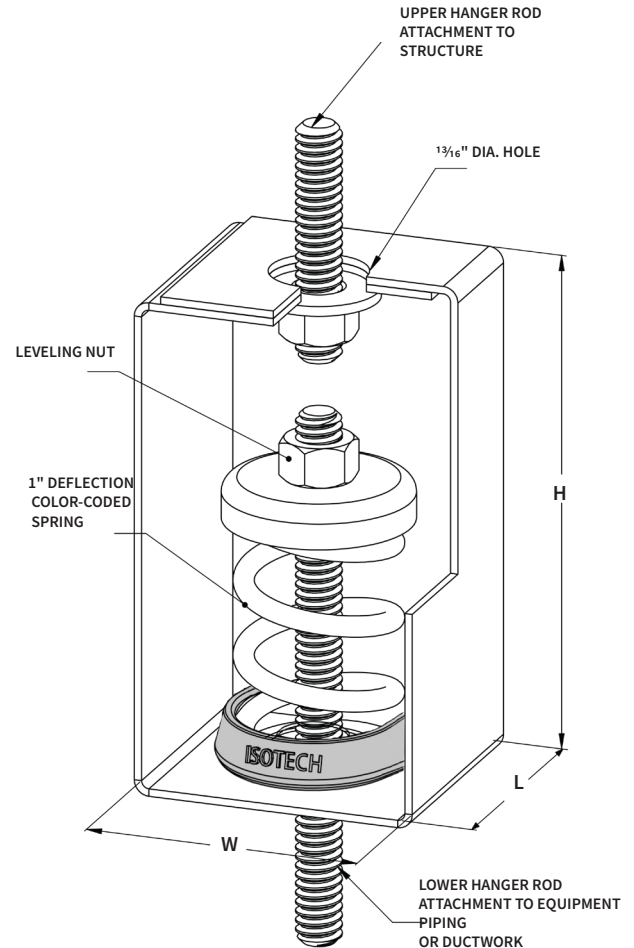

ISOLATOR'S LOCATIONS

1:	5:
2:	6:
3:	7:
4:	8:



Notes:

- Housing is designed to allow 15° misalignment for hanger rod
- Spring and Housing are powder-coated for maximum corrosion protection, and are designed to have minimum 50% over travel under rated load

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA., 92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 www.isotechindustries.com	

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.