

IHSCE-1 SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

File No. : ISOCS-IHSCE-1-15-200

Date: 09/15/15

ISOIN-IHSCE-1-15-200, Installation Instructions Document, to be Reviewed for Installation


SPECIFICATIONS - IHSCE-1" DEFLECTION SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

Model	RATED LOAD		RATED DEFLECTION		SPRING COLOR	APPROX. WT.	
	lbf.	kN	in	mm		lbs.	kg
IHSCE-1-15	15	0.067	1.0	25.4	GREY	0.70	0.32
IHSCE-1-30	30	0.134	1.0	25.4	BLACK	0.71	0.33
IHSCE-1-50	50	0.223	1.0	25.4	RED	0.73	0.34
IHSCE-1-75	75	0.334	1.0	25.4	WHITE	0.73	0.34
IHSCE-1-100	100	0.445	1.0	25.4	YELLOW	0.75	0.35
IHSCE-1-125	125	0.557	1.0	25.4	BLUE	0.78	0.36
IHSCE-1-150	150	0.668	1.0	25.4	ORANGE	0.80	0.37
IHSCE-1-200	200	0.89	1.0	25.4	BROWN	0.81	0.37

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED


Dimension : IHSCE-1" DEFLECTION SPRING HANGER IN-LINE WITH NEOPRENE ELEMENT

Model	H		W		L	
	in	mm	in	mm	in	mm
IHSCE-1-15-200	4 ½	115	2 ¾	61	2 ⅛	53

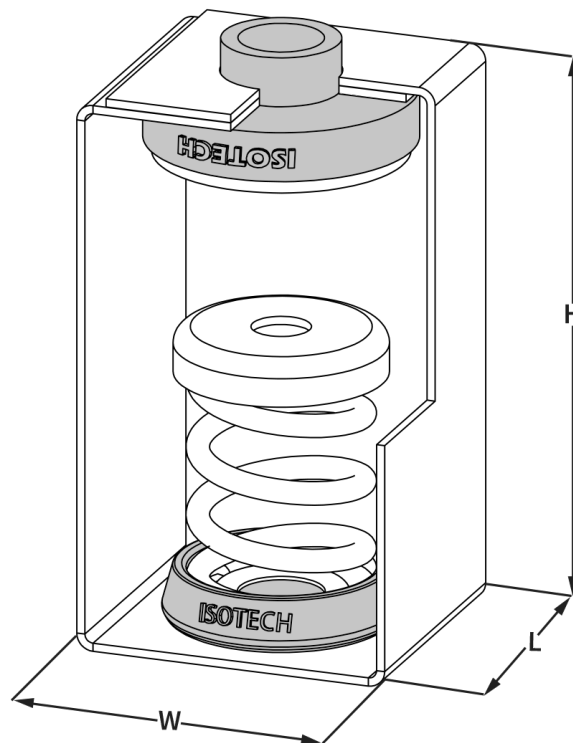


ISOLATOR'S LOCATIONS

1:	5:
2:	6:
3:	7:
4:	8:

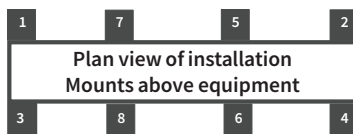

Notes:

- Housing is designed to allow 15° misalignment for hanger rod
- Neoprene Element is designed to provide up to 0.28" deflection at rated load
- Spring and Housing are powder-coated for maximum corrosion protection, and are designed to have minimum 50% over travel under rated load

PROJECT INFORMATION		EQUIPMENT INFORMATION		<div>Canada location</div> <div>35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001</div> <div>USA Location</div> <div>3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930</div> <div>Tool free : 1-888-831-3311 www.isotechindustries.com</div> <div></div>
Customer:		Type:		
Project:		Qty Required:		
Drawing No:		Operating Weight:		
Notes:				

