

## NOTES:


- 1. Review project submittal package and coordinate each isolator's location under equipment.
- 2. Remove Equipment Hold-Down Nut and Washer and insert 3/8" threaded rod into equipment bracket.
- 3. All-Directional Reinforced Snubber must be aligned and centered with ISDR Housing Snubber Hole as shown
- 4. Mark anchor bolt location, drill holes and install seismically-rated anchor bolts per manufacturer's anchor installation.
- 5. Review submittal package or anchor's manufacturer installation instructions for anchor embedment and edge distance- complete anchors' installation by tightening anchors per rated torques specified in manufacturer's instructions.
- 6. No Adjustment is required on Double-Deflection Neoprene Mount. IDR must be properly selected based on equipment corner weights. Deflection on ISDR-A-XX Neoprene mount at the rated load provides equal space between snubber washers at top and bottom with ISDR housing as shown.
- 7. Secure equipment to ISDR isolators by tightening Equipment Hold-Down Nut and Washer.
- 8. Isolators NOT TO BE moved laterally while supporting equipment weight.


## **ISDR -** RUBBER IN-SHEAR DOUBLE DEFLECTION FLOOR MOUNT

File No. : ISOCS-ISDR-A -XX

ISOIN-IDDR-A-XX, Installation Instructions document, to be Reviewed for Installation

Date: 23/11/16

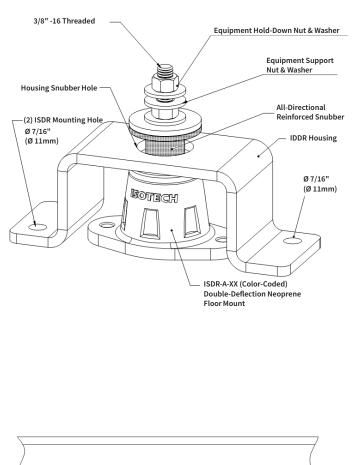

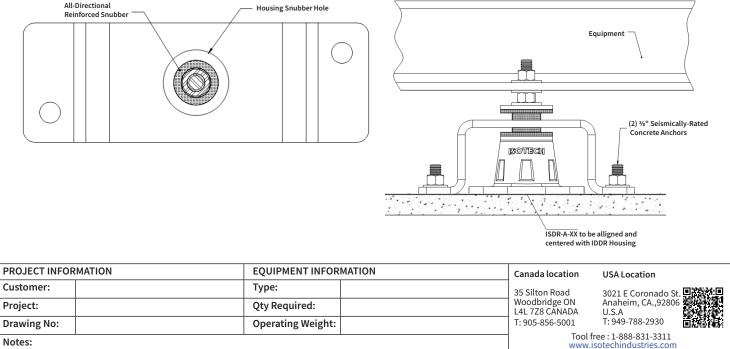

COPYRIGHT: UNLESS OTHERWISE AGREED OR STATED IN WRITING, ALL INFORMATION AND DESIGNS DISPLAYED WITHIN ARE ALL THE PROPERTY OF ISOTECH INDUSTRIES INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED OUTSIDE OF ISOTECH INDUSTRIES INC. WITH THE EXCEPTION OF AUTHORIZED PERSONS WITH LEGITIMATE NEED TO KNOW WHO BY THE USE OF THIS RECOGNIZE ISOTECH INDUSTRIES INC. OWNERSHIP AND WILL COMPLY TO MAINTAIN THIS INFORMATION AND DESIGN IN STRICT CONFIDENCE.