






SPECIFICATIONS : ITCH-1" DEFLECTION DECK SUSPENDED PRE-COMPRESSED COMPACT CEILING HANGER WITH IN-LINE NEOPRENE SPRING CUP

Model	RATED LOAD		RATED DEFLECTION		Spring Color	Approx. WT.	
	lbf.	Kn	in	mm		lbs.	Kg
ITCH-1-30	30	0.13	1.0	25.4	GREY	2.05	0.93
ITCH-1-60	60	0.27	1.0	25.4	BLACK	2.05	0.93
ITCH-1-100	100	0.45	1.0	25.4	RED	2.10	0.95
ITCH-1-150	150	0.67	1.0	25.4	WHITE	2.15	0.98
ITCH-1-200	200	0.89	1.0	25.4	YELLOW	2.20	1.00
ITCH-1-250	250	1.11	1.0	25.4	BLUE	2.20	1.00
ITCH-1-300	300	1.34	1.0	25.4	ORANGE	2.25	1.02
ITCH-1-400	400	1.78	1.0	50.8	BROWN	2.25	1.02

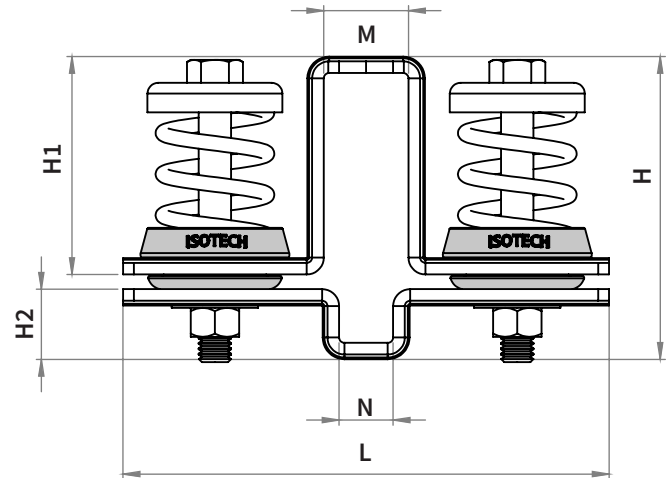

DIMENSION : ITCH-1" DEFLECTION DECK SUSPENDED PRE-COMPRESSED COMPACT CEILING HANGER WITH IN-LINE NEOPRENE SPRING CUP

Model	L		W		H		W1		W2	
	in	mm	in	mm	in	mm	in	mm	in	mm
ITCH-1-30-400	5 1/2	143	3 1/2	86	3 1/2	89	2 1/2	64	3	76
	M		N		øD		H1		H2	
	in	mm	in	mm	in	mm	in	mm	in	mm
	1	25	1/2	16	3/8	10	2 1/2	64	1 3/16	21
	D2		Spring Adjustment Bolt							
	in	mm	3/8"							
	3/8	10								

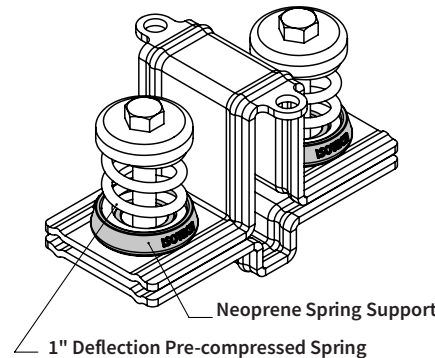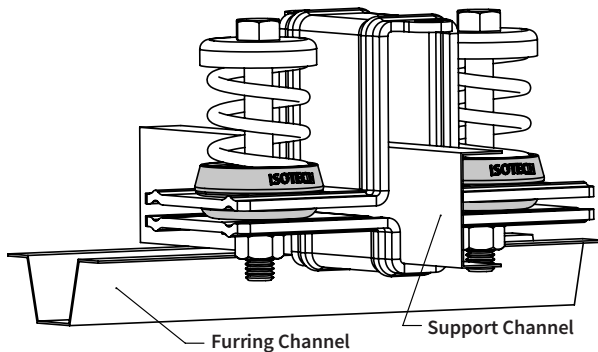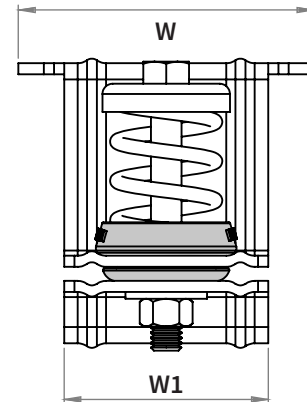

Notes:

- Springs are powder- coated and housing is zinc-plated to provide maximum corrosion resistance
- Springs are color coded
- All springs have additional travel to solid equal to 50% of the Rated Deflection with
- Minimum Kx/Ky ratio of 0.8 - All Elements are safe at solid load
- Spring is supported by Neoprene cup to provide maximum efficiency on vibration

PROJECT INFORMATION		EQUIPMENT INFORMATION		Canada location	USA Location
Customer:		Type:		35 Silton Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001	3021 E Coronado St. Anaheim, CA, 92806 U.S.A T: 949-788-2930
Project:		Qty Required:			
Drawing No:		Operating Weight:			
Notes:				Tool free : 1-888-831-3311 www.isotechindustries.com	