


SPECIFICATIONS - IHSCE-1GEE-1"DEFLECTION COMPACT CEILING HANGER WITH DECK SUPPORT, TOP AND BOTTOM EYE BOLT

| Model | RATED LOAD | | RATED DEFLECTION | | SPRING COLOR | APPROX. WT. | |
|----------------|------------|-------|------------------|------|--------------|-------------|------|
| | lbf. | kN | in | mm | | lbs. | kg |
| IHSCE-1GEE-15 | 15 | 0.067 | 1.0 | 25.4 | GREY | 1.75 | 0.8 |
| IHSCE-1GEE-30 | 30 | 0.134 | 1.0 | 25.4 | BLACK | 1.80 | 0.82 |
| IHSCE-1GEE-50 | 50 | 0.223 | 1.0 | 25.4 | RED | 1.85 | 0.84 |
| IHSCE-1GEE-75 | 75 | 0.334 | 1.0 | 25.4 | WHITE | 1.85 | 0.84 |
| IHSCE-1GEE-100 | 100 | 0.445 | 1.0 | 25.4 | YELLOW | 2.00 | 0.91 |
| IHSCE-1GEE-125 | 125 | 0.557 | 1.0 | 25.4 | BLUE | 2.00 | 0.91 |
| IHSCE-1GEE-150 | 150 | 0.668 | 1.0 | 25.4 | ORANGE | 2.00 | 0.91 |
| IHSCE-1GEE-200 | 200 | 0.89 | 1.0 | 25.4 | BROWN | 2.00 | 0.91 |

HARDWARE NOT INCLUDED - SPRING CUP : ZINC PLATED

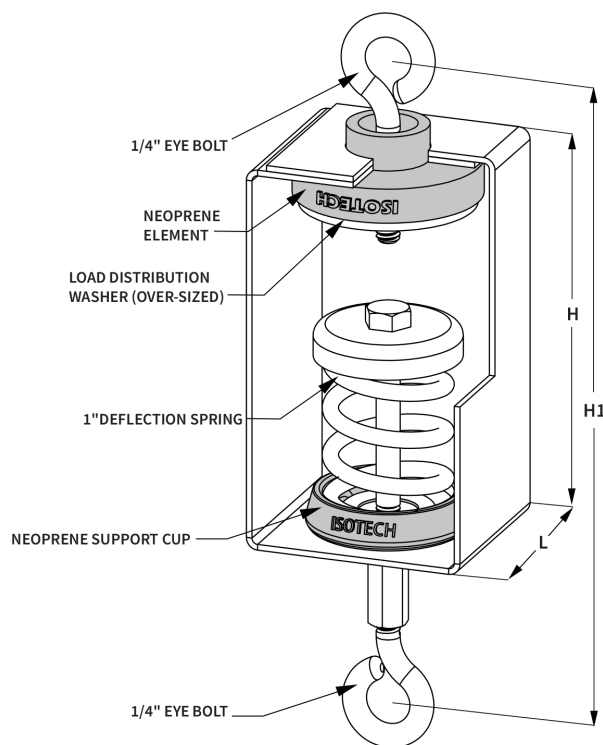


Dimension : IHSCE-1GEE-1"DEFLECTION COMPACT CEILING HANGER WITH DECK SUPPORT, TOP AND BOTTOM EYE BOLT

| Model | L | | W | | H | | H1 | |
|-------------------|--------|----|-------|----|-------|-----|----|-----|
| | in | mm | in | mm | in | mm | in | mm |
| IHSCE-1GEE-15-200 | 2 1/16 | 53 | 2 3/8 | 61 | 4 1/4 | 108 | 9 | 229 |

ISOLATOR'S LOCATIONS


| | |
|----|----|
| 1: | 5: |
| 2: | 6: |
| 3: | 7: |
| 4: | 8: |



Notes:

- Housing is designed to allow 15° misalignment for hanger rod
- Neoprene Element is designed to provide up to 0.28" deflection at rated load
- Spring and Housing are powder-coated for maximum corrosion protection, and are designed to have minimum 50% over travel under rated load

| PROJECT INFORMATION | | EQUIPMENT INFORMATION | | Canada location | USA Location |
|---------------------|--|-----------------------|--|--|---|
| Customer: | | Type: | | 35 Siltan Road Woodbridge ON L4L 7Z8 CANADA T: 905-856-5001 | 3021 E Coronado St. Anaheim, CA.,92806 U.S.A T: 949-788-2930 |
| Project: | | Qty Required: | | | |
| Drawing No: | | Operating Weight: | | | |
| Notes: | | | | | |



Tool free : 1-888-831-3311
www.isotechindustries.com