


SPECIFICATIONS : IVLCS - ISOTECH V-LOOP DOUBLE BRAIDED WITH CARBON STEEL GROOVE END						
Model	Hose Dia (in)	Pressure @ 70 ° F (PSI)	Pressure @ 250 ° F (PSI)	Overall Length 'A' (in)	Hight Length 'B' (in)	Maximum Deflection ± (in)
IVLCS-1D-4-GR	1	500	455	36.00	14.75	4
IVLCS-1.25D-4-GR	1 ¼	500	455	38.50	15.50	4
IVLCS-1.5D-4-GR	1 ½	500	455	40.50	16.75	4
IVLCS-2D-4-GR	2	500	455	45.50	19.00	4
IVLCS-2.5D-4-GR	2 ½	500	455	48.50	20.00	4
IVLCS-3D-4-GR	3	400	364	54.75	23.00	4
IVLCS-4D-4-GR	4	350	318	61.25	26.00	4
IVLCS-5D-4-GR	5	240	218	70.00	29.50	4
IVLCS-6D-4-GR	6	275	250	77.00	32.50	4
IVLCS-8D-4-GR	8	250	227	90.50	38.00	4

MATERIALS OF CONSTRUCTION	
HOSE:	316SS Standard Pitch
BRAID	304SS Double Braid
END FITTINGS:	Carbon Steel Sch40
RAID BANDS:	304SS — Standard

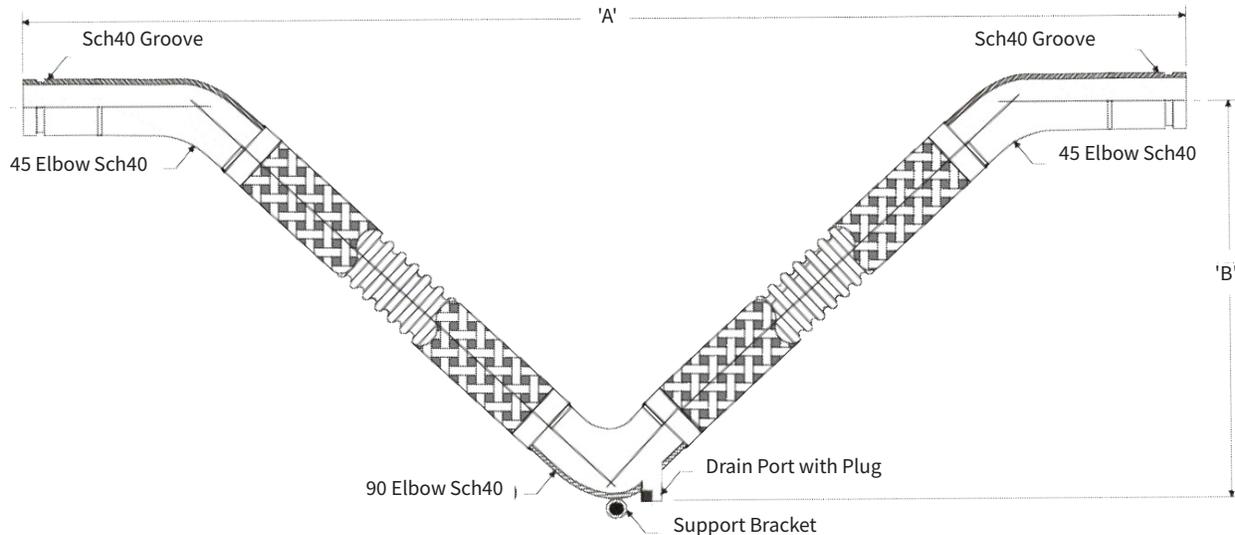

TEMPERATURE CORRECTION FACTORS	
TEMP ° F	FACTOR
70	1.00
150	0.96
250	0.91
400	0.82
600	0.73

NOTE:
FOR SAFE MAXIMUM OPERATING PRESSURE, MULTIPLY PRESSURE RATING LISTED AT 70 ° F BY THE APPLICATION TEMPERATURE CORRECTION FACTOR.



EXAMPLE:
GIVEN THE APPLICATION WORKING TEMPERATURE OF 250 ° F, IF USING A 2" HOSE ASSEMBLY, MULTIPLY 500 X 0.91 RESULT = 2" HOSE ASSEMBLY IS RATED FOR A MAXIMUM OF 455 PSI @ 250 ° F.

PROJECT INFORMATION		EQUIPMENT INFORMATION		CANADA	UNITED STATES
Customer:		Type:		8 High Meadow Place, North York, ON M9L 2Z5, CANADA	800-7700 Irvine Center Dr., Irvine, CA 92618, U.S.A.
Project:		Qty Required:		C: 416-831-3000	C: 714-264-8090
Drawing No:		Operating Weight:		www.isotechindustries.com	
Notes:					